

LAYING INSTRUCTION

BERGO SOLID™

bergo
FLOORING





1. Read the entire instruction carefully before installing.

2. Take pictures for future records:

a. Before the installation starts b. During installation c. After installation.

For installation you might need:



Tape measure



Jig saw or similar



Hammer

Available Items



BERGO SOLID™
Art. No. 900BK300



GROUND ANCHOR
For fixing Bergo Solid to
a soft substructure
Art. No. 900300



GEOTEXTILE
Underlayment



BERGO MULTIFIX
Cleaning agent
for Bergo floors
Art. No. 166783D



Preliminary work/Surface


The flexible SOLID flooring System can be placed even on grounds with very low CBR values, e.g. clay etc.

The soft ground material will fill up the underneath rip design of the elements to further increase element stability. Important is that the ground is not sinking such as moor, swamp land, etc. The floor tiles create a “bridging-effect” over the laid out ground.

The driveway should be fixed also in width to have the best possible shear force performance especially if the driveway is going up and down in longitudinal direction and eventually also has a transversal angle.

Assembling on different surfaces

A geotextile underneath protects Bergo Solid from dirt on soft grounds like grass, sand or soil.

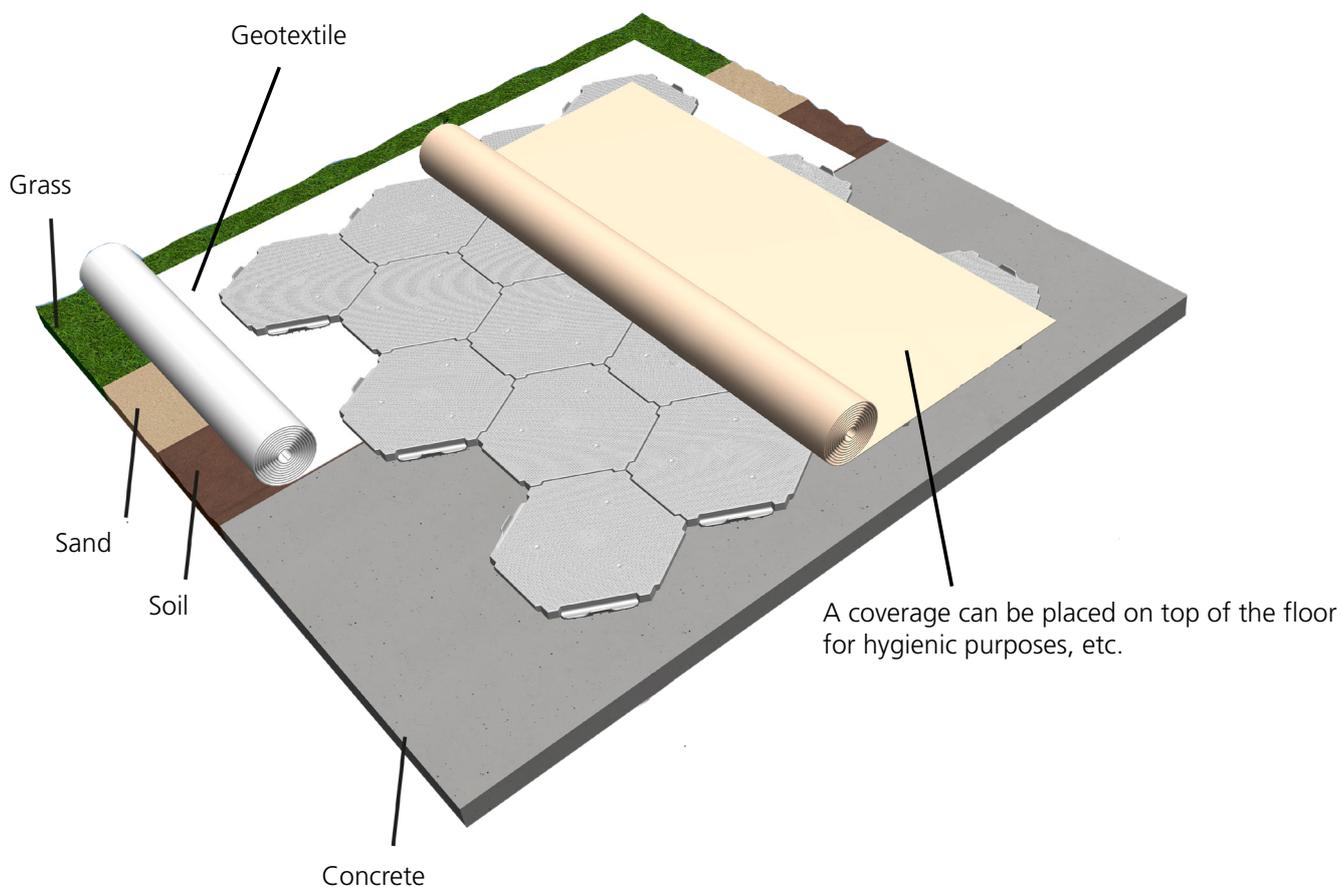

Installation of Bergo Solid on hard surfaces over 1000 m²


In some cases on hard surfaces, it may be necessary to lay a 5 cm layer of sand under Bergo Solid, so that the tiles do not slide during heavy traffic. The sand makes the tiles lie more still.

Cut for a straight finish (optional)


If a straight edge is desired, Bergo Solid can be sawn.



Half tiles for straight edge:

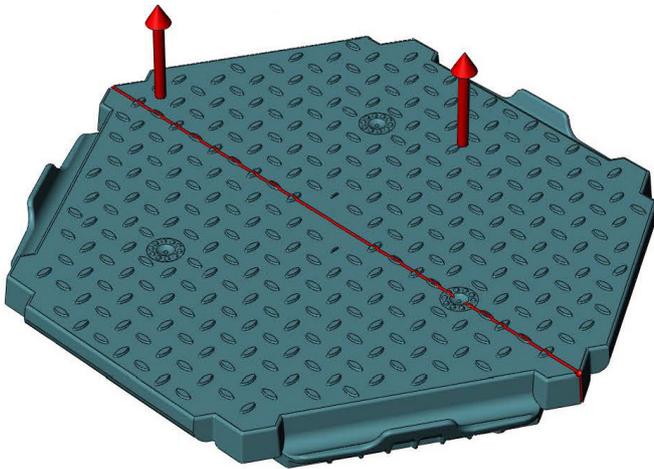

Triangles for straight edge:

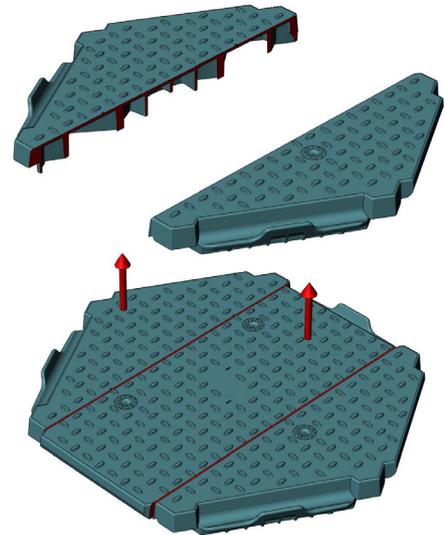


Installation

1. Measure a straight line on the long and the short side.



2. It is important to start assembly in a corner and continue to lay the tiles in rows from one side to the other side:

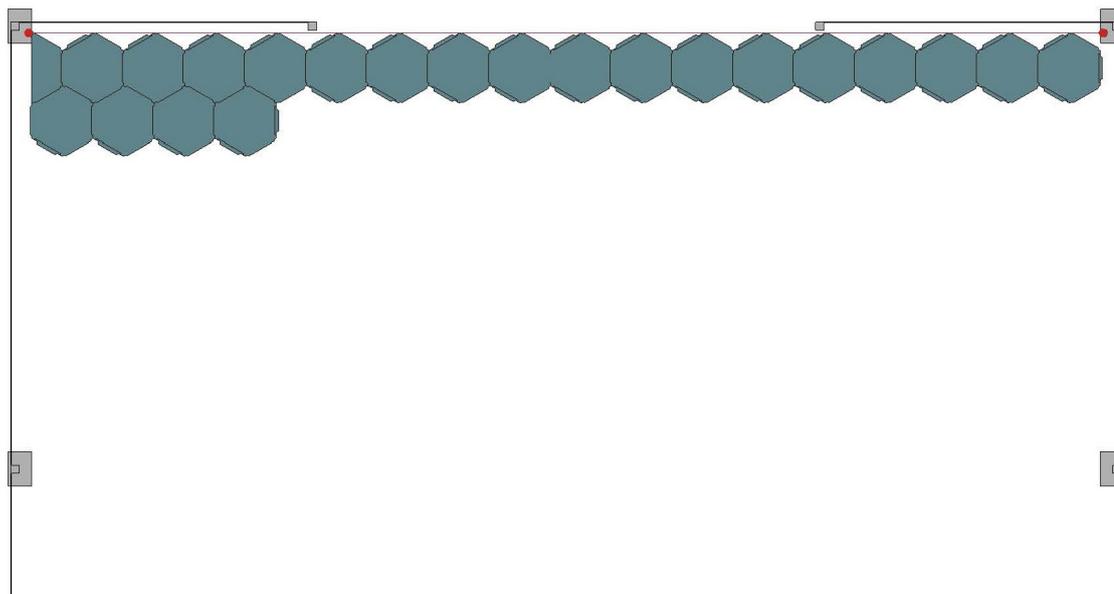

3. Assembly by placing the tiles together and against your measured straight lines.





Anchoring Bergo Solid on soft surfaces (optional)

If anchoring of Bergo Solid is desired, floor Ground anchors can be used on soft surfaces only.



Minimal maintenance

Bergo SOLID™ require minimal maintenance. You can clean your surface when needed, using a high-pressure water hose to remove dust and dirt.

Bergo Multifix

Bergo Multifix is a well-tested cleaning agent for heavily soiled Bergo floors. Most cleaning agents can be used to remove dirt, but some are especially suited for composites.

LAYING INSTRUCTION

BERGO SOLID™



Good Luck with the installation!

**We hope you enjoy your Bergo Solid Floor
many years to come.**

www.bergoflooring.com

Feel free to send us pictures
of your installation!
info@flooring.se

If you have any questions,
please contact customer
services
+46(0)371-58 77 00
info@flooring.se